



REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED

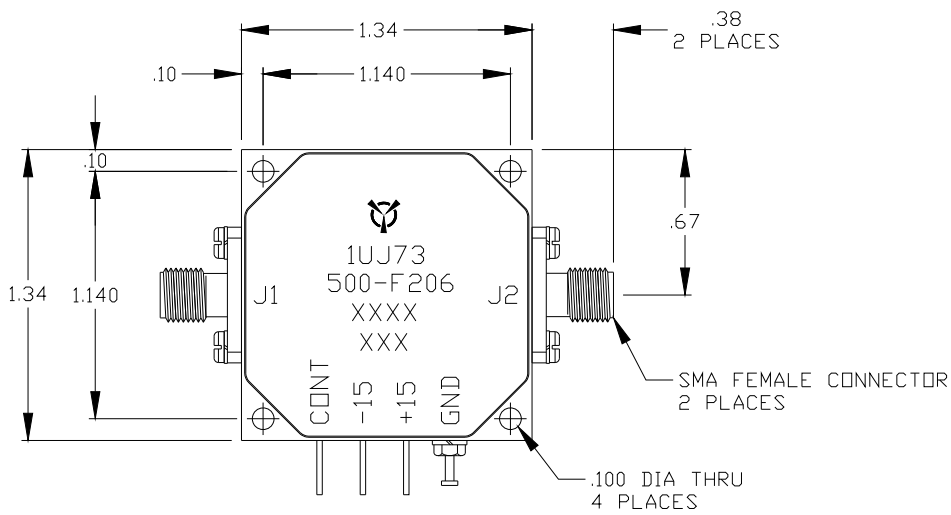

**SPECIFICATIONS**

FREQUENCY RANGE:	2.0-6.0 GHz
DYN RANGE:	60 dB
INSERTION LOSS:	2.5 dB MAX
FLATNESS:	+/-0.5 dB OR +/-4%
VSWR:	2.0:1 MAX
CONTROL VOLTAGE:	0 TO 10 VOLTS
INPUT IMPEDANCE:	10 K OHMS
LINEARITY:	+/- 1 dB MAX
SWITCHING TIME:	1.25 USEC MAX
TEMP STABILITY:	0.02 dB/°C MAX
RF POWER:	0 dBm
DC POWER:	+15 @ 130 MA MAX -15 @ 50 MA MAX

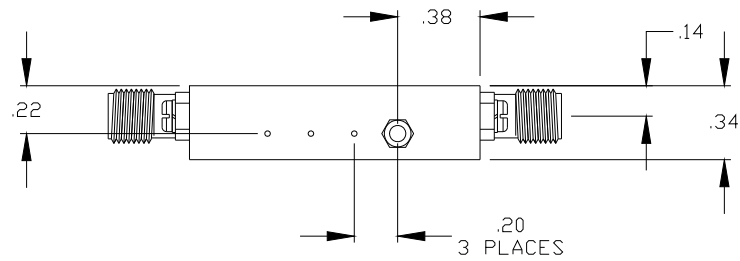

- NOTES:
- FINISH: WASH PRIMER PER DDD-P-15328D  
PRIMER PER MIL-P-23377D  
PAINT PER MIL-C-22750  
COLOR :BLUE
  - MARKING: BLACK EPOXY INK .08 HIGH CHARACTERS  
PER MIL-STD- 130

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEM(S) WITHOUT WRITTEN PERMISSION

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ON FINISHES:  
ANGLES: 1/2° FRACTIONS: ±1/64  
3 PLACE DECIMALS: ±.005  
2 PLACE DECIMALS: ±.01  
1 PLACE DECIMALS: ±.1  
FILLET: .005R MAX  
REMOVE BURRS AND SHARP EDGES  
TO .005 MAX. R OR CHAMFER

DRAFT	MRG	DATE	4-25-03
CHKD			
PRDD			
ENGR			
QA			

TITLE			2-6 GHz ATTENUATOR OUTLINE	
SIZE	CAGE CODE	DWG NO	500-F206	
B	1UJ73			
SCALE	2/1	SHEET 1 OF 1		



One Tanguay Avenue  
Nashua, New Hampshire 03063-1711  
Phone: 603-459-0127 • Fax: 603-459-0227  
Email: Sales@RH-Labs.com