REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED
	01	REVISED		

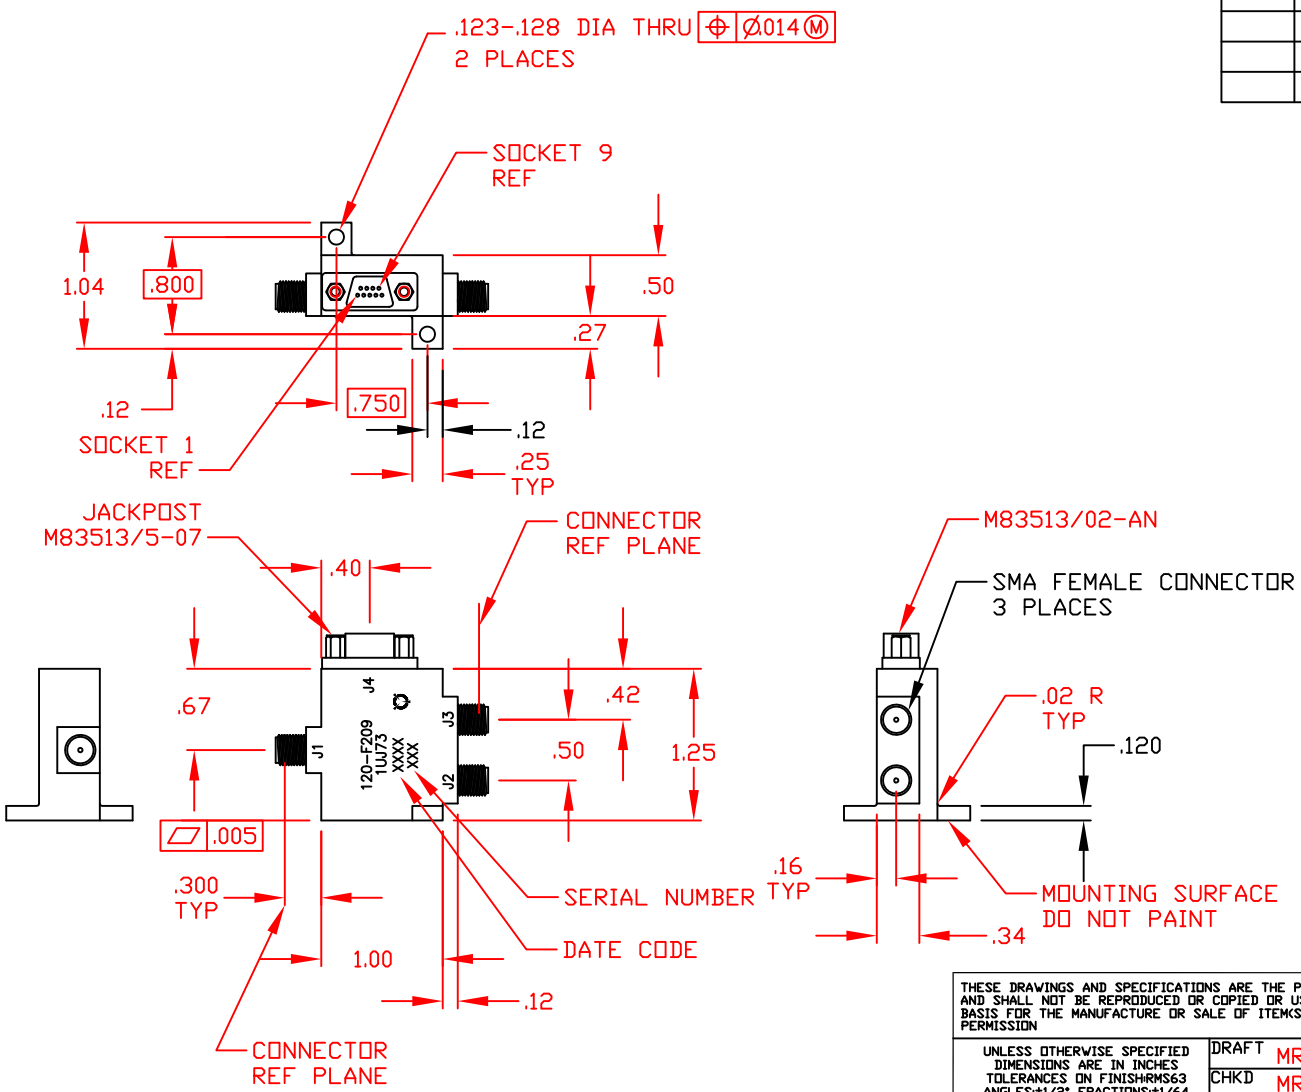

SPECIFICATIONS

FREQUENCY: 11–14 GHz
ISOLATION: 40dB MIN.
INSERTION LOSS: 1.4dB MAX
VSWR: 1.6:1
SWITCHING SPEED: 1 MICRO SEC
POWER: 80 WCW
MOUNTING TEMP: −20 TO +85°C
BIAS: +28V (8mA)
−5V (280mA)
+5V (20mA)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEM(S) WITHOUT WRITTEN PERMISSION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON FINISHRMS63
ANGLES:±1/2° FRACTIONS:±1/64
3 PLACE DECIMALS: ± .010
2 PLACE DECIMALS: ± .02
1 PLACE DECIMALS: ± .1
FILLETS: .005R MAX
REMOVE BURRS AND SHARP EDGES
TO .005 MAX. R OR CHAMFER

DRAFT	MRG	11-3-02
CHKD	MRG	11-1-05
PROD	KF	11-1-05
ENGR	FEH	9-25-06
QA		

TITLE: OUTLINE SPDT SWITCH

SIZE	CAGE CODE	DWG NO
B	1UJ73	120-F209

SCALE 1/1 SHEET 1 OF 1