


REVISIONS				
ZONE	SYM	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	7-18-17	MRG

SMA FEMALE CONNECTOR  
2 PLCS

DATE CODE  
SERIAL NUMBER

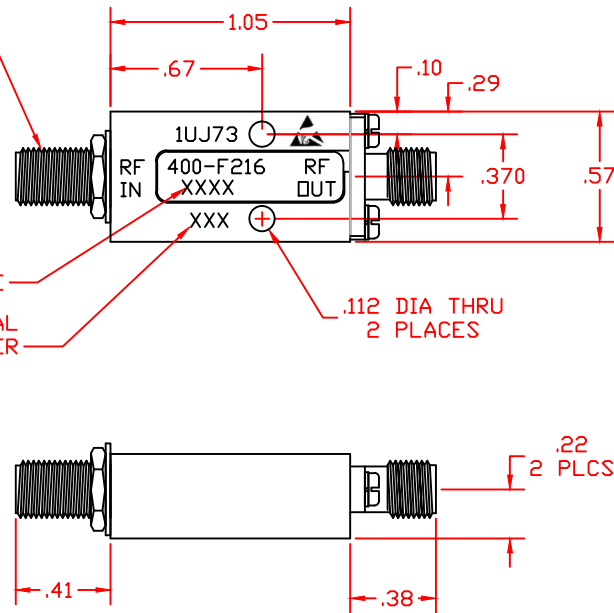

SPECIFICATIONS

FREQUENCY RANGE:	2.7 - 3.4 GHz
PEAK POWER:	4 WATTS MAX
PULSE WIDTH:	200 MICRSEC
DUTY CYCLE:	20%
AVERAGE POWER:	0.8 WATTS MAX
LEAKAGE:	+15 dBm MAX
INSERTION LOSS:	1.0 dB MAX
RETURN LOSS:	14 dB MIN
RECOVERY TIME:	50 ns

**CAUTION**  
STATIC SENSITIVE MATERIAL  
ALL HANDLING/INSPECTION TO BE PERFORMED  
ONLY AT APPROVED WORK STATIONS

- NOTES:
- FINISH: WASH PRIMER PER DOD-P-15328D  
PRIMER PER MIL-P-23377D  
PAINT PER MIL-C-22750  
COLOR :BLUE
  - MARKING: BLACK INK .06 HIGH CHARACTERS  
PER MIL-STD-130.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF RH LABS AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FINISHES: 6.3 ANGLES: ±1/2° FRACTIONS: ±1/64 3 PLACE DECIMALS: ±.010 2 PLACE DECIMALS: ±.02 1 PLACE DECIMALS: ±.1 FILLETS: .005R MAX REMOVE BURRS AND SHARP EDGES TO .005 MAX. R OR CHAMFER			TITLE <b>LIMITER OUTLINE</b>		
DRAFT	MRG	DATE	7-18-17	SIZE	B
CHKD	MRG	DATE	7-18-17	CAGE CODE	1UJ73
PRDD				DWG NO	400-F216
ENGR				SCALE	2/1
QA					SHEET 1 OF 1